



佛山市王永利传动科技有限公司


FOSHAN ULIFLEX TRANSMISSION TECHNOLOGY CO., LTD
 地址：佛山市禅城区张槎一路115号4座10楼
 ADD: 10th floor, No 4 building, No.115, 1st Zhangcha Road,
 Foshan, Guangdong, P.R.China
 TEL: (86)-757-82268953 82726061 82711709
 FAX: (86)-757-82729016
 MOB: (0)13809819467
 Http: //www.uliflex.com
 E-mail: sales@uliflex.com
 E-mail: uli@uliflex.com
 服务热线: (0)13902416013

鹤山市王永利工业器材发展有限公司

HESHAN ULIFLEX INDUSTRIAL EQUIPMENT CO., LTD.
 地址：广东省江门市鹤山市鹤城工业三区
 ADD: No.3 Industrial Zone, Hecheng, Heshan, Jiangmen
 City, Guangdong Province China.
 TEL: (86)-750-8383 700 / 701 / 702
 FAX: (86)-750-8383 700
 Http: //www.uliflex.com
 E-mail: uli@uliflex.com
 E-mail: sales@uliflex.com




电子画册 请扫二维码

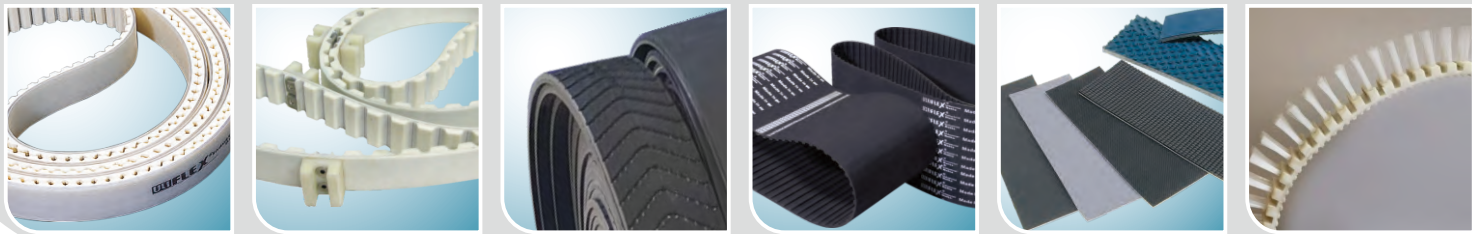

- 1、具体型号、材料、颜色、请咨询永利工业皮带相关技术人员；
 - 2、特殊规格产品可订做；
 - 3、本公司保留更改产品参数的权利；
 - 4、本公司保留最终解释权。
1. If need specific type, material, color, please consult the relevant technical staffs.
 2. All could be made according to the requirements of client.
 3. All rights for parameters changing reserved.
 4. All rights reserved.



永利同步带，一带胜一带 ULIFLEX BELTS BETTER AND BETTER

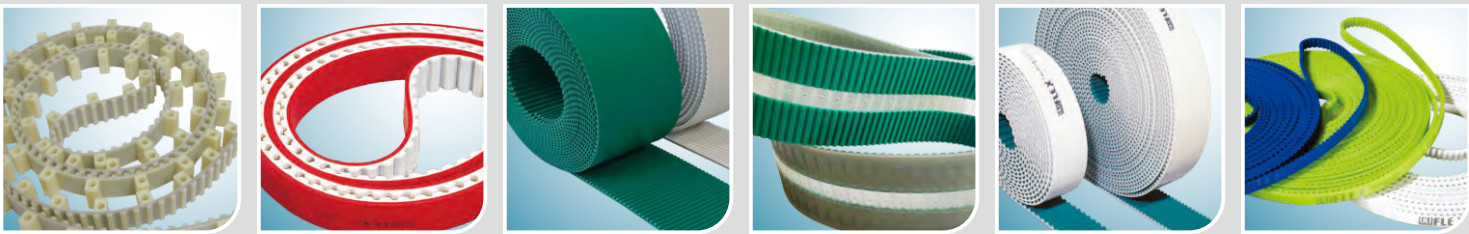

PRODUCT CATALOGUE
 www.uliflex.com



企业简介 COMPANY INTRODUCTION

佛山王永利工业皮带公司是集科、工、贸为一体的专业工业皮带公司；并和国外合作，研发、生产、销售工业皮带、同步轮及设备的专业企业，专门经营“ULIFLEX Industrial Belts”品牌的各类工业皮带。

目前主要生产加工：

- (1) 聚氨酯各类（AT20、AT15、ATN20、T20、AT10、ATN10、SFAT10、BAT10、ATP10、T10、AT5、T5、TT5、XXH、XH、H、L、XL、HTD3M、S3M、HTD5M、S5M、RPP5M、HTD8M、S8M、RPP8M、HTD14M、S14M、RPP14M、HTD20M等）环形无缝、开口、接驳同步带；
- (2) 橡胶多楔带(PH、PJ、PK、PL、PM)、三角带（SPZ、SPA、SPB、SPC、3V、5V、8V等），同步带（H、L、MXL、XL、L、H、XH、XXH、HTD3M、HTD5M、HTD8M、HTD14M、S2M、S3M、S5M、S8M、S14M等）
- (3) 尼龙片基带、PVC、PU平面输送带；
- (4) 皮带背面各类弹性体（橡胶、PU、海绵、尼龙布等）的铺钻、皮带均厚、均宽、开槽、打孔、焊接等特殊加工。

产品应用于陶瓷、玻璃、纺织、印刷、包装等行业并深受广大顾客好评。尤其是玻璃机械方面，我公司所提供的环形无缝同步带，解决了一般驳口带难以解决的问题。整条同步带的骨架是一条钢绳无驳口，抗拉强度是一般驳口带的两倍，不容易拉长拉断，整条同步带均宽，宽度公差±0.1mm；整条同步带均厚，厚度公差±0.1mm。



ULIFLEX company is a professional manufacturer for industrial belts and equipments. It has cooperated with foreign companies to develop products which are widely used in the mechanical transmission of ceramic, glass, textile, food, automobile, tobacco, medicine and so on. ULIFLEX has developed for over ten years, now it becomes one of the famous brands for industrial belts. Our company adheres to the “human orientation and credit operation” corporate philosophy and the “quality first, favored price, good service and continuous innovation” business purpose, and provides 24-hour service. The company occupies a total area of 15666 square meters. Apart from owning advanced equipments for manufacturing and processing belts, the company also has advanced test equipments to ensure the quality of belts. Now our company has owned eight national patents which is in the leading position in the domestic field.

Main products:

- (1) PU Timing Belts(AT20、AT15、ATN20、T20、AT10、ATN10、SFAT10、BAT10、ATP10、T10、AT5、T5、TT5、XXH、XH、H、L、XL、HTD3M、S3M、HTD5M、S5M、RPP5M、HTD8M、S8M、RPP8M、HTD14M、S14M、RPP14M、HTD20M、 etc) Endless, Open-end, Joined.
- (2) Rubber Pedion/Diprosopia Wedge Belt (PH,PJ,PK,PL,PM)，V-Belts（SPZ,SPA,SPB,SPC,3V,5V,8V etc），Timing Belts(H,L,MXL,XL,L,H,XH,XXH,HTD3M,HTD5M,HTD8M,HTD14M,S2M,S3M,S5M,S8M,S14M etc).
- (3) Nylon Base Belts, PVC/PU Conveyor Belts.
- (4) Services of backing elastic materials (rubber, PU, sponge, nylon etc), averaging belts thickness and width, notching, perforating, welding etc.

PU环型无缝同步带
PU endless timing belt



产品概述 product introduction

永利工业皮带PU无缝环型同步带系列，是由高强度连续不断螺旋状的钢丝芯或Kevlar芯，和性能优良的聚氨酯材料组成。更适合用于高负载的动力传送，一般动力传送在1 0000r.p.m以上的机械设备，大都选用该类同步齿带。





其优点为：抗拉强度大、传动精度高、稳定性好、耐油、低噪音、广泛应用于陶瓷、玻璃、石材、纺织、烟草等各种行业。有驳口带无可比拟的优点。

可在各类PU无缝环型同步带系列背面加贴橡胶、PU、PVC、花纹、海绵、泡棉、尼龙布等弹性体。底面可铸造或焊接各类导向条，使同步带使用性能更加优异。

ULIFLEX PU Timing Belts series are endless belts with continuous tensile cords. The timing belts are applied for industrial power transmission above 10000 r.p.m. The innovative construction utilizes excellent raw materials combined with well designed body for increased capacity and performance.

Features/Advantages: Suitable for all industries. Durable construction resists oil, and provides high strength and noise reduction.

产品结构图 Product structure

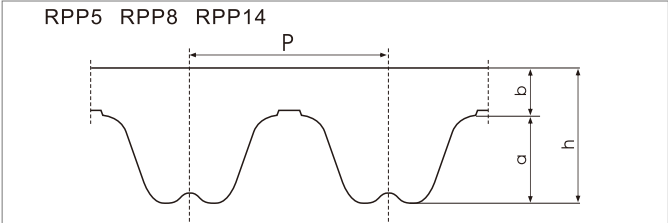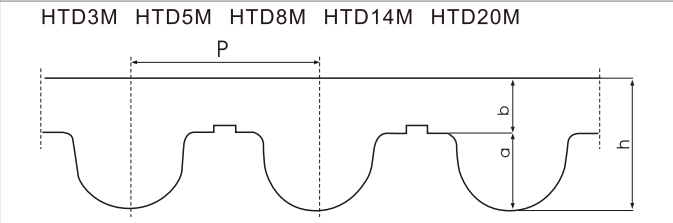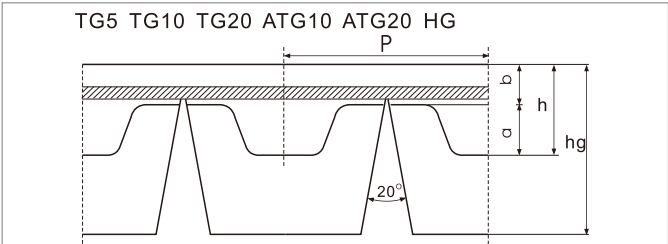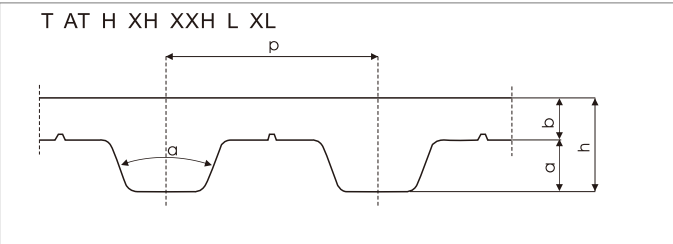

PU环型无缝同步带和开口带规格及参数 (以下型号均可生产双面齿环形无缝同步带和开口带)

PU truly endless timing belt and PU open end timing belt specification

型号 Model	齿距(mm) Pitch	角度 Angel	h(mm)	a(mm)	b(mm)	最短长度 (mm)	最长长度 (mm)	最大宽度 (mm)	最小 带轮齿数
XL	5.08	50	2.3	1.27	1.03	2159	12000	100	10
L	9.525	40	3.6	1.9	1.7	2171.7	15000	200	10
H	12.7	40	4.3	2.29	2.01	2159	15600	300	14
XH	22.225	40	11.2	6.35	4.85	2311.4	15600	400	18
XXH	31.75	40	15.7	9.35	6.35	2794	15600	400	25

T5	5	40	2.2	1.2	1	2160	12000	150	10
TT5	5	40	2.8	1.2	1.6	2160	15000	150	10
T10	10	40	4.5	2.5	2	2160	15600	400	12
T20	20	40	8	5	3	2280	15600	400	15
AT5	5	50	2.7	1.2	1.5	2160	15600	100	15
AT10	10	50	4.5	2.5	2	2160	15600	200	15
AT20	20	50	8	5	3	2280	15600	400	20


型号 Model	齿距(mm) Pitch	角度 Angel	h(mm)	hg(mm)	a(mm)	b(mm)	最短长度 (mm)	最长长度 (mm)	最大宽度 (mm)	最小 带轮齿数
TG5	5	40	2.2	5	1.2	1	2150	12000	100	15
TG10	10	40	4.5	8.3	2.5	2	2150	15000	100	17
TG20	20	40	8	9.5	5	3	2280	15600	200	23
ATG10	10	50	4.5	8.3	2.5	2	2280	15600	100	23
ATG20	20	50	8	13	5	3	2280	15600	200	23
HG	12.7	40	4.3	8.3	2.29	2.01	2150	15600	100	18

型号 Model	齿距(mm) Pitch	角度 Angel	h(mm)	a(mm)	b(mm)	最短长度 (mm)	最长长度 (mm)	最大宽度 (mm)	最小 带轮齿数
HTD3M	3	-	2.4	1.22	1.18	2150	6000	50	15
HTD5M	5	-	3.6	2.1	1.5	2150	6000	100	16
HTD8M	8	-	5.6	3.4	2.2	2280	15600	200	20
HTD14M	14	-	10	6.1	3.9	2500	15600	200	30
HTD20M	20	-	13.2	8.4	4.8	2500	15600	230	30

S3M	3	-	2.2	1.14	1.06	2150	6000	50	15
S5M	5	-	3.4	1.91	1.49	2150	12000	100	16
S8M	8	-	5.3	3.05	2.25	2280	15600	150	20
S14M	14	-				2500	15600	230	30

RPP5	5	-	3.8	2	1.8	2150	12000	50	16
RPP8	8	-	5.4	3.2	2.2	2280	15600	100	20
RPP14	14	-	10	6	4	2500	15600	110	30

注：以上各类同步带齿面和齿背均可加绿色耐磨尼龙布。

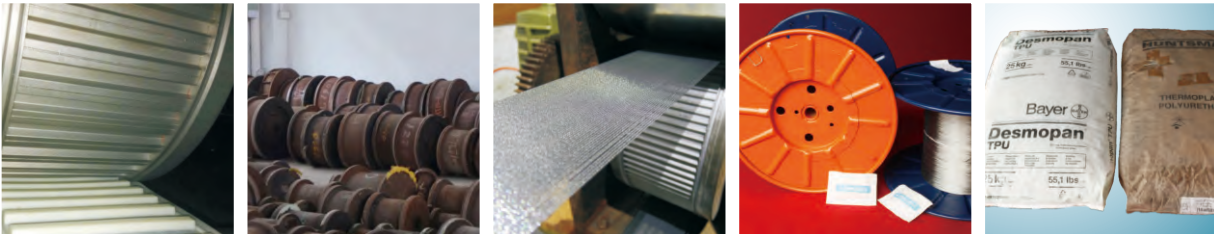


PU环型无缝同步带 PU endless timing belt

产品概述 product introduction

永利工业皮带双面齿PU无缝环型同步带系列，是由高强度连续不断螺旋状的钢丝芯或Kevlar芯，和性能优良的聚氨酯材料组成。更适合用于高负载的动力传送，一般动力传送在10000r.p.m以上的机械设备，大都选用该类同步齿带。

其优点为：抗拉强度大、传动精度高、稳定性好、耐油、低噪音、广泛应用于陶瓷、玻璃、石材、纺织、烟草等各种行业。有驳口带无可比拟的优点。

ULIFLEX PU Double Timing Belts series are endless belts with continuous tensile cords. The timing belts are applied for industrial power transmission above 10000 r.p.m. The innovative construction utilizes excellent raw materials combined with well designed body for increased capacity and performance.

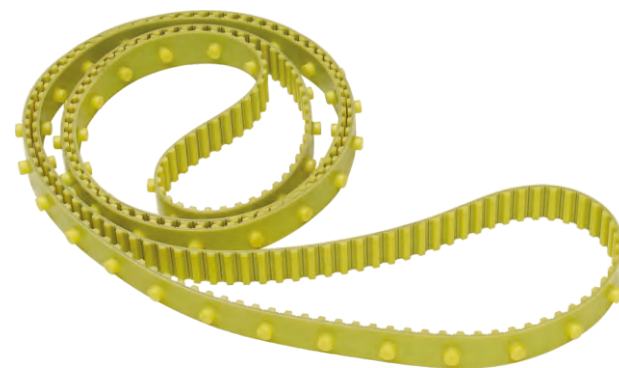

1200mm宽幅PU同步带 Super width PU timing belt

产品概述 product introduction

永利工业皮带可生产幅宽超过1200mm的聚氨酯同步带，是由高强度连续不断螺旋状的钢丝芯或Kevlar芯，和性能优良的聚氨酯材料组成，可取代平面传动带，不滑动，不需要再次张紧，所需的传动力更小，传动定位更准确，背面可加尼龙布，减小噪音和摩擦。该产品可应用于食品行业、轮胎制造行业等。

ULIFLEX PU Timing Belt is made of continuous tensile cords or Kevlar cords. The max width for the PU Timing Belt is 1200mm. Apart from no-slip, no second tension, less driving force and pinpoint spot, the PU timing belts could stick nylon on the back to reduce noise pollution and ease friction.

Application: Food Industry, Tyre Industry etc.



工业皮带背衬弹性体加工 Elastic materials are backed on belts

产品概述 product introduction

各类皮带背面加贴橡胶、PU、花纹、海绵、泡绵、尼龙布等弹性体。底面焊接各类导向条
(例：M、A、B型等)

Elastic materials can be backed on belts as rubber, PU, patterns, sponge, foam and nylon etc. Guiding notches can be welded onback. (Model: M、A、B)



电梯曳引钢带 Elevator Industry Belt

型号 Model	钢丝数目 Steel cord qty	钢丝直径 Diameter	厚度 Thickness
30mm	6pcs 10pcs 12pcs	1.73mm	3.2mm
40mm	18pcs	1.73mm	3.2mm
50mm	20pcs	1.73mm	3.2mm
60mm	24pcs	1.73mm	3.2mm



PU开口同步带 PU Open End Timing Belt

产品概述 product introduction

AT20、AT15、ATN20、T20、AT10、ATN10、SFAT10、BAT10、ATP10、T10、AT5、T5、TT5、XXH、XH、H、L、XL、HTD3M、S3M、HTD5M、S5M、RPP5M、HTD8M、S8M、RPP8M、HTD14M、S14M、RPP14M、HTD20M等。

每卷最小包装为100米，常规颜色为乳白，部分可生产黑色、红色、蓝色。

The min length per roll is 100mtr, the normal color is white, parts of size can produce black, red and blue.



特殊加工同步带

Backing & Mechanical Fasten& Profiles



防静电同步带系列 Antistatic Belt Series




大圆机专用TT5系列同步带 Special TT5 Timing Belt Series for Circular Knitting Machine



10-TT5


	环型 Endless	接驳 Joined	内芯材料 Cord material
颜色 Color	蓝、荧光绿、白 Blue, green, white	蓝、荧光绿、白 Blue, green, white	凯夫拉芯 Kevlar cord
最短长度 Min length	2800mm	2800mm	或钢丝芯 Steel cord
最长长度 Max length	19800mm	-	

PU三角带、五角带、圆带 PU V-belt, Pentagon belt, Round belt

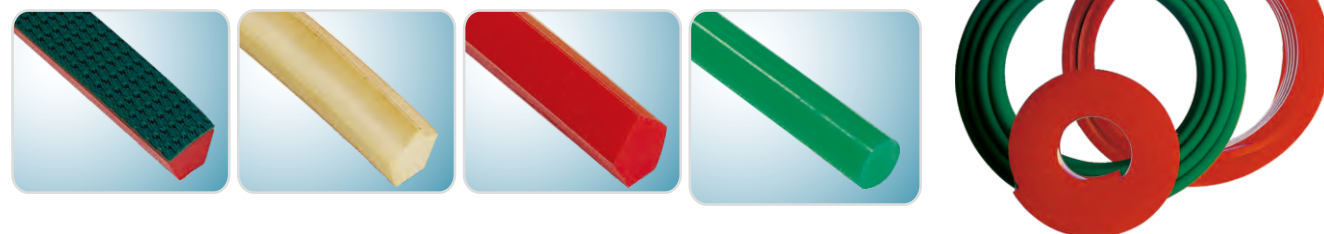

真空吸附同步带系列 Vacuum Belt Series

同步带齿面开槽、磨平、打孔等各种特殊加工。
Service of notching, grinding and perforating
etc. can be provided.

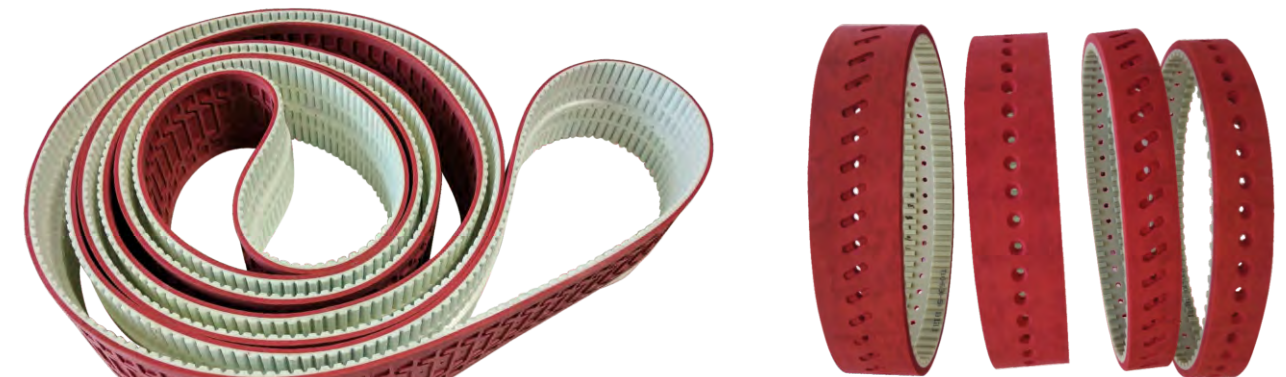

PU环型动力同步带

Ulipower timing Belts

型 号 Model	整模宽度 Width	节线长(mm) length	型 号 Model	整模宽度 Width	节线长(mm) length	型 号 Model	整模宽度 Width	节线长(mm) length	型 号 Model	整模宽度 Width	节线长(mm) length	型 号 Model	整模宽度 Width	节线长(mm) length	型 号 Model	整模宽度 Width	节线长(mm) length	型 号 Model	整模宽度 Width	节线长(mm) length			
T5-120	150	120	T5-885	150	885	T10-960	200	960	AT5-825	200	825	L-86	200	218.44	T5DL-410	200	410	XL-60	150	152.4	HTD3M-174	150	174
T5-150	150	150	T5-900	150	900	T10-970	200	970	AT5-860	200	860	L-124	200	314.33	T5DL-460	200	460	XL-70	150	177.8	HTD3M-180	150	180
T5-180	150	180	T5-940	150	940	T10-980	200	980	AT5-975	200	975	L-150	200	381.00	T5DL-590	200	590	XL-80	150	203.2	HTD3M-195	150	195
T5-185	150	185	T5-990	150	990	T10-1010	200	1010	AT5-1050	200	1050	L-187	200	476.25	T5DL-620	200	620	XL-90	150	228.6	HTD3M-204	150	204
T5-200	150	200	T5-1075	150	1075	T10-1080	200	1080	AT5-1125	200	1125	L-202	200	514.35	T5DL-750	200	750	XL-96	150	243.8	HTD3M-207	150	207
T5-210	150	210	T5-1100	150	1100	T10-1110	200	1110	AT5-1500	200	1500	L-210	200	533.40	T5DL-815	200	815	XL-100	150	254.0	HTD3M-225	150	225
T5-215	150	215	T5-1160	150	1160	T10-1140	200	1140	AT5-2000	200	2000	L-225	200	571.50	T5DL-860	200	819.15	XL-106	150	269.2	HTD3M-225	150	225
T5-220	150	220	T5-1200	150	1200	T10-1150	200	1150				L-240	200	609.60	T5DL-940	200	876.30	XL-110	150	269.4	HTD3M-288	150	288
T5-225	150	225	T5-1215	150	1215	T10-1210	200	1210				L-255	200	647.70	T5DL-1100	200	933.45	XL-120	150	304.8	HTD3M-312	150	312
T5-245	150	245	T5-1275	150	1275	T10-1240	200	1240				L-270	200	685.80				XL-130	150	330.2	HTD3M-327	150	327
T5-250	150	250	T5-1280	150	1280	T10-1250	200	1250	AT10-500	200	500	L-285	200	723.90				XL-134	150	340.3	HTD3M-327	150	327
T5-255	150	255	T5-1315	150	1315	T10-1300	200	1300	AT10-560	200	560	L-300	200	762.00				XL-140	150	355.6	HTD3M-339	150	339
T5-260	150	260	T5-1355	150	1355	T10-1320	200	1320	AT10-600	200	600	L-322	200	819.15	T10DL-260	200	260	XL-150	150	381.0	HTD3M-357	150	357
T5-270	150	270	T5-1380	150	1380	T10-1350	200	1350	AT10-610	200	610	L-345	200	876.30	T10DL-530	200	530	XL-160	150	406.4	HTD3M-384	150	384
T5-280	150	280	T5-1580	150	1580	T10-1390	200	1390	AT10-660	200	660	L-367	200	933.45	T10DL-630	200	630	XL-170	150	431.8	HTD3M-420	150	420
T5-295	150	295	T5-1955	150	1955	T10-1400	200	1400	AT10-700	200	700	L-390	200	990.60	T10DL-660	200	660	XL-180	150	457.2	HTD3M-465	150	465
T5-305	150	305	T5-830	150	830	T10-1420	200	1420	AT10-730	200	730	L-420	200	1066.80	T10DL-720	200	720	XL-190	150	482.6	HTD3M-645	150	645
T5-330	150	330	T5-840	150	840	T10-1460	200	1460	AT10-780	200	780	L-450	200	1143.00	T10DL-840	200	840	XL-194	150	492.7	HTD3M-669	150	669
T5-340	150	340	T5-860	150	860	T10-1500	200	1500	AT10-800	200	800	L-480	200	1219.20	T10DL-920	200	920	XL-200	150	508.0	HTD3M-672	150	672
T5-350	150	350				T10-1560	200	1560	AT10-840	200	840	L-510	200	1295.40	T10DL-980	200	980	XL-210	150	533.4			
T5-355	150	355				T10-1610	200	1610	AT10-880	200	880	L-540	200	1371.60	T10DL-1210	200	1210	XL-220	150	558.8	HTD5M-350	150	350
T5-365	150	365				T10-1750	200	1750	AT10-890	200	890	L-570	200	1447.80	T10DL-1240	200	1240	XL-230	150	584.2	HTD5M-400	150	400
T5-390	150	390	T10-260	200	260	T10-1780	200	1780	AT10-920	200	920	L-600	200	1524.00	T10DL-1250	200	1250	XL-240	150	609.6	HTD5M-425	150	425
T5-400	150	400	T10-340	200	340	T10-1880	200	1880	AT10-960	200	960	L-750	200	1905.00	T10DL-1320	200	1320	XL-250	150	635.0	HTD5M-450	150	450
T5-410	150	410	T10-370	200	370	T10-1960	200	1960	AT10-980	200	980				T10DL-1350	200	1350	XL-260	150	660.4	HTD5M-500	150	500
T5-420	150	420	T10-390	200	390	T10-2250	200	2250	AT10-1000	200	1000				T10DL-1420	200	1420	XL-270	150	685.8	HTD5M-540	150	540
T5-455	150	455	T10-400	200	400				AT10-1010	200	1010				T10DL-1610	200	1610	XL-288	150	731.5	HTD5M-550	150	550
T5-460	150	460	T10-410	200	410				AT10-1050	200	1050				T10DL-1880	200	1880	XL-290	150	736.6	HTD5M-600	150	600
T5-470	150	470	T10-440	200	440				AT10-1080	200	1080							XL-300	150	762.0	HTD5M-740	150	740
T5-480	150	480	T10-480	200	480	AT5-225	200	225	AT10-1100	200	1100							XL-356	150	904.2	HTD5M-890	150	890
T5-500	150	500	T10-500	200	500	AT5-255	200	255	AT10-1150	200	1150							XL-414	150	1051.5	HTD5M-1025	150	1025
T5-510	150	510	T10-530	200	530	AT5-280	200	280	AT10-1200	200	1200							XL-450	150	1143.0	HTD5M-1200	150	1200
T5-515	150	515	T10-560	200	560	AT5-300	200	300	AT10-1210	200	1210							XL-566	150	1437.6	HTD5M-1700	150	1700
T5-525	150	525	T10-600	200	600	AT5-330	200	330	AT10-1220	200	1220									HTD5M-1760	150	1760	
T5-545	150	545	T10-610	200	610	AT5-340	200	340	AT10-1250	200	1250									HTD5M-2000	150	2000	
T5-550	150	550	T10-630	200	630	AT5-375	200	375	AT10-1280	200	1280									HTD5M-2090	150	2090	
T5-560	150	560	T10-660	200	660	AT5-390	200	390	AT10-1300	200	1300									HTD5M-2250	150	2250	
T5-575	150	575	T10-680	200	680	AT5-420	200	420	AT10-1320	200	1320									HTD5M-2650	150	2650	
T5-590	150	590	T10-690	200	690	AT5-450	200	450	AT10-1350	200	1350									HTD5M-2775	150	2775	
T5-610	150	610	T10-700	200	700	AT5-455	200	455	AT10-1360	200	1360									HTD5M-2800	150	2800	
T5-620	150	620	T10-720	200	720	AT5-500	200	500	AT10-1400	200	1400									HTD5M-3000	150	3000	
T5-630	150	630	T10-730	200	730	AT5-525	200	525	AT10-1420	200	1420												
T5-650	150	650	T10-750	200	750	AT5-545	200	545	AT10-1480	200	1480												
T5-660	150	660	T10-780	200	780	AT5-600	200	600	AT10-1500	200	1500												
T5-690	150	690	T10-810	200	810	AT5-610	200	610	AT10-1600	200	1600												
T5-720	150	720	T10-840	200	840	AT5-660	200	660	AT10-1700	200	1700												
T5-750	150	750	T10-880	200	880	AT5-710	200	710	AT10-1720	200	1720												
T5-765	150	765	T10-890	200	890	AT5-720	200	720	AT10-1800	200	1800												
T5-780	150	780	T10-900	200	900	AT5-750	200	750	AT10-1860	200	1860												
T5-815	150	815	T10-920	200	920	AT5-780	200	780	AT10-1940	200	1940												

型 号 Model	整模宽度 Width	节线长(mm) length
L-86	200	218.44
L-124	200	314.33
L-150	200	381.00
L-187	200	476.25
L-202	200	514.35
L-210	200	533.40
L-225	200	571.50
L-240	200	609.60
L-255	200	647.70
L-270	200	685.80
L-285	200	723.90
L-300	200	762.00
L-322	200	819.15
L-345	200	876.30
L-367	200	933.45
L-390	200	990.60
L-420	200	1066.80
L-450	200	1143.00
L-480	200	1219.20
L-510	200	1295.40
L-540	200	1371.60
L-570	200	1447.80
L-600	200	1524.00
L-750	200	1905.00

型 号 Model	整模宽度 Width	节线长(mm) length
T5DL-410	200	410
T5DL-460	200	460
T5DL-590	200	590
T5DL-620	200	620
T5DL-750	200	750
T5DL-815	200	815
T5DL-860	200	819.15
T5DL-940	200	876.30
T5DL-1100	200	933.45

型 号 Model	整模宽度 Width	节线长(mm) length
XL-60	150	152.4
XL-70	150	177.8
XL-80	150	203.2
XL-90	150	228.6
XL-96	150	243.8
XL-100	150	254.0
XL-106	150	269.2
XL-110	150	269.4
XL-120	150	304.8
XL-130	150	330.2
XL-134	150	340.3
XL-140	150	355.6
XL-150	150	381.0
XL-160	150	406.4
XL-170	150	431.8
XL-180	150	457.2
XL-190	150	482.6
XL-194	150	492.7
XL-200	150	508.0
XL-210	150	533.4
XL-220	150	558.8
XL-230	150	584.2
XL-240	150	609.6
XL-250	150	635.0
XL-260	150	660.4
XL-270		